

PowerPro Extreme® 5


High-Torque, High-Output Heavy Duty Design

12V

Weighs 21.5 lbs. / 9.8 kg

Ideal for Diesel Engines Up to 10L

Engineered and designed to deliver consistent, reliable starting performance under the most demanding conditions, PowerPro Extreme® 5 premium starters are ideal for medium duty engines and deliver 5kW of starting power to a variety of popular engines. The new PowerPro Extreme 5 motors – a high-torque, high-efficiency series – provide coverage for 6- to 10-liter engines used in construction, fire and rescue, pickup and delivery, refuse and school bus applications. Each PowerPro Extreme 5 starter meets major OE engine manufacturer testing specifications, ensuring a simplified preventative maintenance program and a significant increase in vehicle uptime.

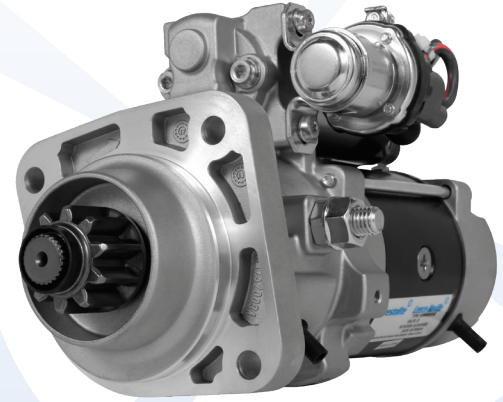

FEATURES

BENEFITS

Robust Armature Design	Reduces power loss & provides higher reliability for more consistent performance
Soft Start Relay	Ensures positive pinion engagement with the flywheel & reduces potential for ring gear damage
Integral Magnetic Switch (IMS)	Helps eliminate voltage drop issues by minimizing the wiring distance between relay & solenoid
Fully Sealed Noseless Design	Adds service life & protects internal components

ENGINES

M95301H	Cummins ISC, ISL, International DT466E, DT530E, DT570E, Maxx Force DT 9&10
M95303H M95307H	Cummins ISB
M95309H	Detroit Diesel DD5 5.1L & DD8 7.7L

SPECS

Engine Size	Up to 10L
Voltage	12V
Rotation	Clockwise
Mounting	SAE 1 & SAE 3
Pinion Data	M95301H, 12 Tooth, 82.5° M95303H, 10 Tooth, 322.5° M95307H, 10 Tooth, 319° M95309H, 11 Tooth, 37.5°
Output	5kW
Flange	Fixed
Weight	21.5 lbs / 9.8 kg
Operating Temperature	-40°C to 125°C
IMS Position	M95301H - 1 o'clock M95303H - 3 o'clock M95307H - 11 o'clock M95309H - 3 o'clock
Warranty	Truck Applications, 1-Year/150,000 Miles*



* Check with your Prestolite representative for more details

Contact Your Sales Representative Today!

7585 Empire Drive • Florence, KY 41042 • (800) 354-0560 • PowerProStarters.com

Learn more
@PrestoliteElectric



Unit Interchange Data

PRESTOLITE	CUMMINS	DELCO REMY†		DENSO	FLEETRITE	INTERNATIONAL	LESTER	MERITOR	WILSON
M95301H	3965283 5267908	1990319 1993794 1993865 1993874 1993928 1993969 8200005 8200025 8200107 8200211 8200217 8200374 8200836 8200958 8300005	8300065 10461005 10461169 10461171 10461277 10461385 10461386 10461769 10478999 10479034 10479106 10479250 10479300 19026028 19026029	228000-851 2280008510 228000-8510	FLTST3804	3593808C91 3593808C92 3808509C92	6384 6400 6613 6808	STR0121	91014396 91-01-4379 91-01-4396N

PRESTOLITE	CUMMINS	DELCO REMY†		DENSO	DIAMOND GARD	DIXIE	MITSUBISHI	PACCAR	UNIPOINT	WAI	WILSON
M95303H	5267911	8200023 8200077 8200196 8200235 8200375 8200571 8200834	8300024 8300066 19026031 61005266 61006210 61006211	428000-9340	IN0971	200-38102 201-38102 TS-1754	9T50971ZX M009T50971ZX	D61-6005-004	STR-0124	6809N	91-01-4623 91-01-4779

PRESTOLITE	ARROW HEAD	BLUE BIRD	CUMMINS	DENSO	J&N	LESTER	WILSON
M95307H	SND0703	00108907 10062038	90032414	428000-5120	410-52444	19120	91-29-5835

PRESTOLITE	DELCO REMY†
M95309H	8201105 8200739

†Delco Remy is a registered trademark of General Motors Corporation, licensed to BorgWarner PDS (Anderson) L.L.C.

Contact Your Sales Representative Today!

7585 Empire Drive • Florence, KY 41042 • (800) 354-0560 • PowerProStarters.com

Learn more
@PrestoliteElectric

